




IPPARKING

IP 350/550

Effective access control made easy with IP Parking's high speed, low maintenance barrier gates. Two available types up to a maximum length of 550 cm can be applied to every application imaginable; from small private parkings to major multi-storey parking facilities.

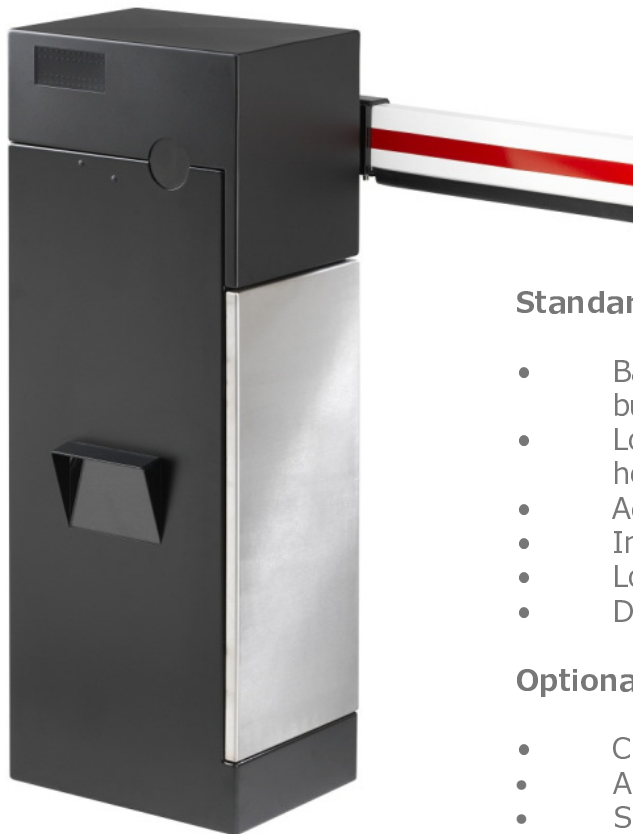


Standard features:

- Barrier arm made of aluminium with rubber bumper and red reflective striping
- Lockable front access door and removable hood
- Adjustable opening -and closing times
- Integrated double detector
- Longlife, low maintenance driving mechanism
- Durable powder coated steel housing

Optional:

- Crash guard
- Alternative RAL colour
- Stainless steel housing
- Foundation
- Integrated red/green LED lights
- Jointed barrier arm available for locations with limited overhead clearance
- Double mounted arm
- Integrated license plate recognition

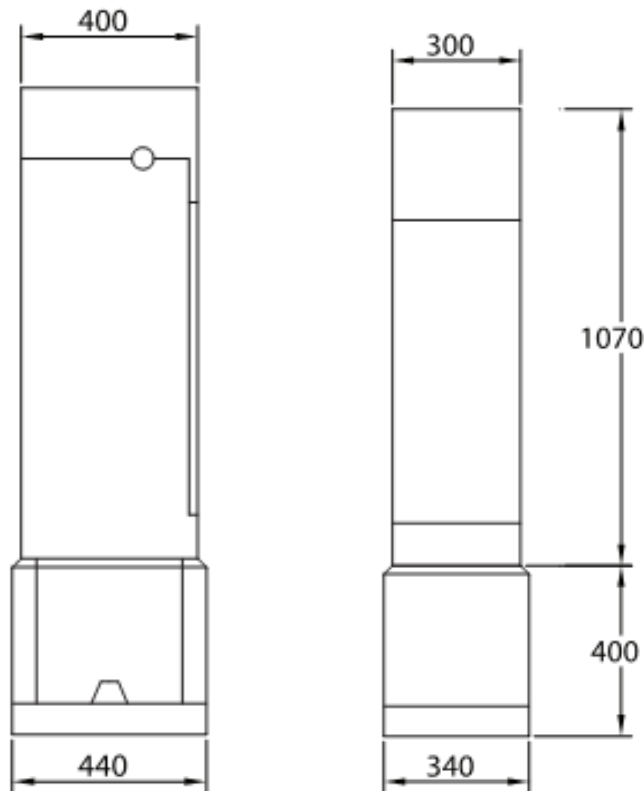

Measurements are displayed in millimeters

Technical specifications:

Supply voltage	230V / 50 Hz
Power consumption	350W (in motion) / 46W (at rest)
Motor	3 phase 230 / 400 VAC
Max. armlength	550 cm
Open / closing time	~1.5 – 3.5 seconds (adjustable)
Three floating contracts	<ul style="list-style-type: none">- Counting puls- Limit switch open- Red / Green LED- Magnet- Flashlight on barrier arm
Weight	~63 kg (excluding foundation)

Product specifications are subject to change without notice