

IP In

The entry station has a modern and functional design. The station is operated by a wired internet connection or through wireless GPRS from the software of the central system. Operation can take place from any location that has internet access. Together with the IP 350 or 500 barrier, this station forms a solid base for the access management of your facility.




Standard features:

- Pushbutton that lights up when a vehicle arrives
- Single-slot card processing, suitable for accepting barcode and cards
- Industrial barcode printer
- Box for 4000 tickets
- Email warning when tickets run out
- Intercom preparation, including call button
- 20-character / 2-line display with LED backlight display
- Good accessibility for service and maintenance
- Heating element with thermostat
- Coated aluminium housing
- I/O interface for communication with external systems and components, such as: sliding gates, fire alarm and height alarm; equipped with 4 relay outputs

Optional:

- Mifare card reader
- Credit card integration
- Intercom system
- 8" TFT screen
- Automatic Number Plate Recognition
- Alternative RAL colour
- Stainless steel housing
- Brushed stainless steel front door
- Elevated base for trucks.
- Intercom with voIP transmission via TCP/IP; no extra wiring necessary (integrated)
- 3rd party reader integration
- IP camera
- Proximity long range reader
- Prefab foundation

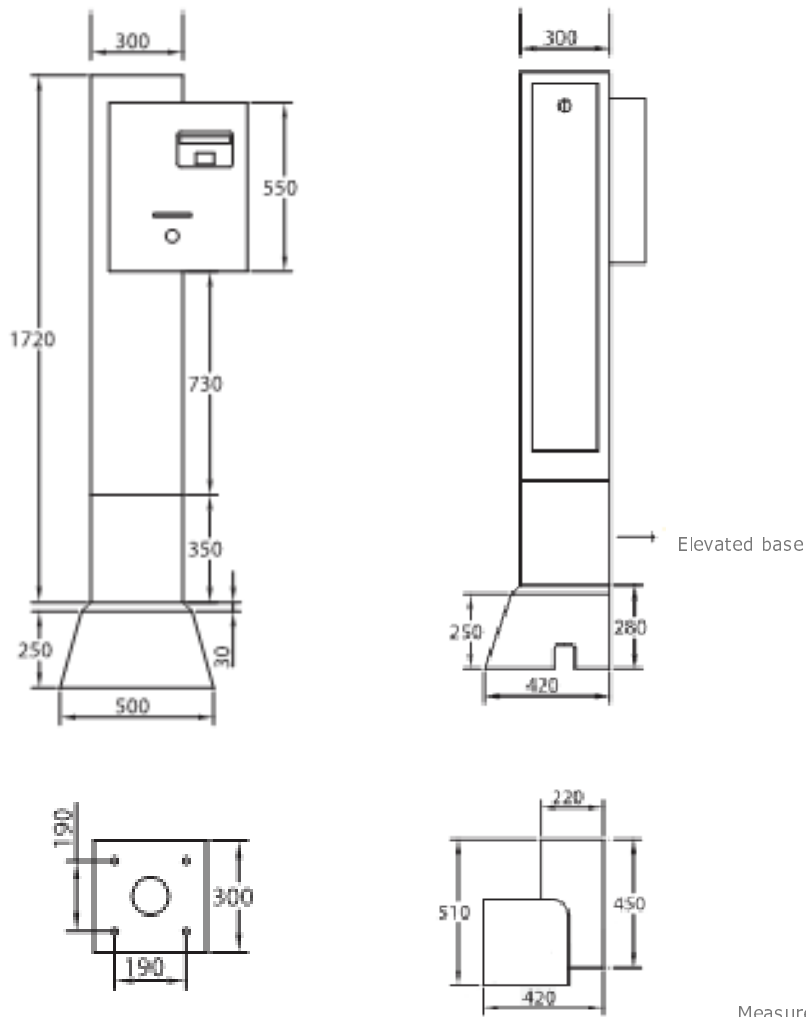

Measurements are displayed in mm

Technical specifications

Supply voltage
Power consumption

230V / 50 Hz
90W (heating "off")
250W (heating "on")
26 Kg. (excluding foundation)

Weight