

## IP Regus

When only subscribers and non-paying visitors are accessing a parking facility, the IP Regus is the ideal solution. The top contains a white LED display so that you can welcome your subscribers and visitors. A non contacting card reader is incorporated and the front side contains a RVS front plate in which an optional intercom system can be installed.




### Standard features:

- 20 character / 20 line display with LED backlight display
- Mifare card reader
- RVS front plate with high quality lock for assembly purposes
- Base plate for assembling on concrete or prefab foundation
- Aluminum housing with anticorrosive treatment and powder coating in RAL 9007
- Interface for control peripherals: 8 x serial, Bi-directional parallel en MDB interface

### Optional

- Intercom preparation including call push button
- Intercom with voIP transmission
- Prefab foundation
- Wireless communication through GPRS
- Housing in color of choice
- Proximity Long Range reader (NEDAP)
- Double version for trucks

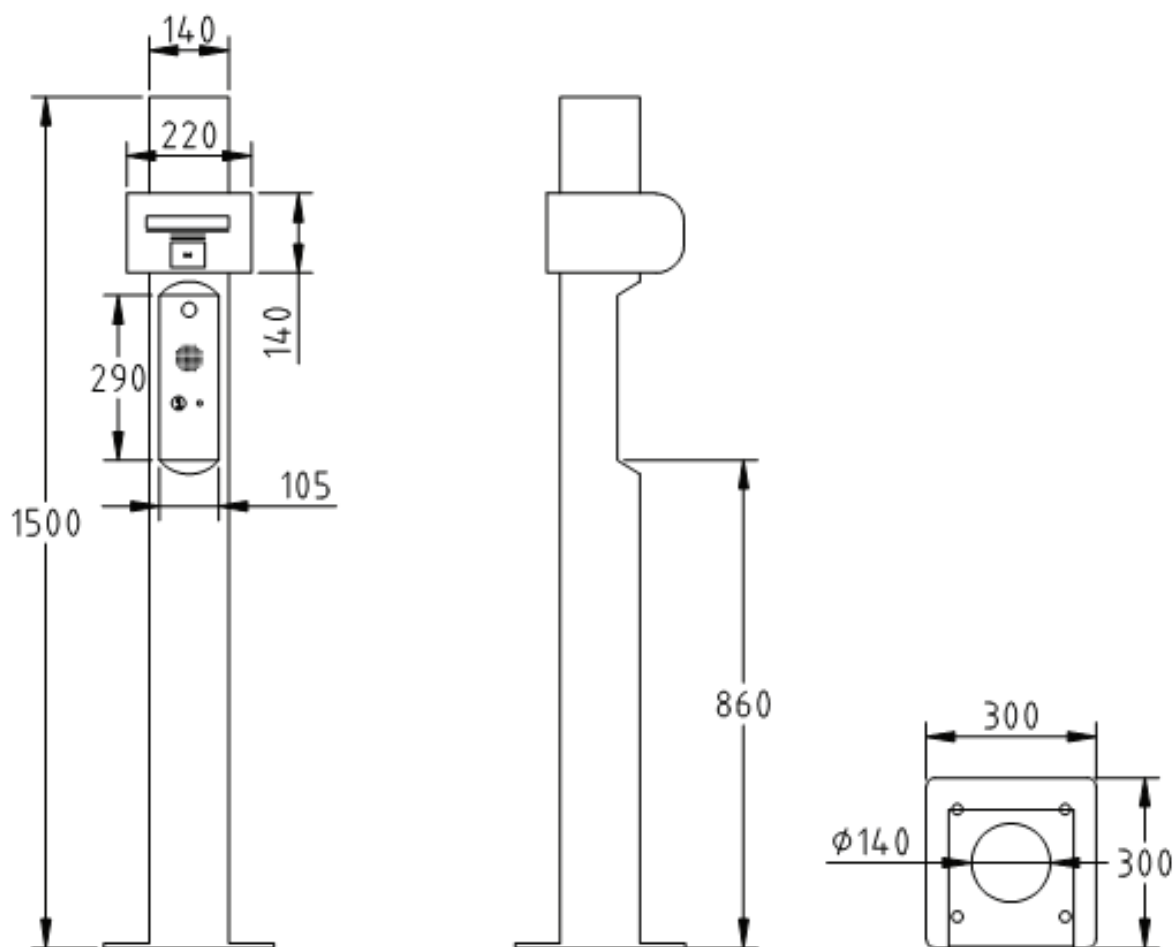

Measurements are displayed in millimeters

### Technical specifications:

|                     |   |
|---------------------|---|
| Supply voltage      | 230V / 50Hz   |
| Power consumption   | 13W   |
| Controlling outputs | Floating contact 24V/1A <ul style="list-style-type: none"> <li>- Open control</li> <li>- Close control</li> <li>- Operating &amp; In-activity</li> <li>- Full signal</li> </ul> |
| Weight              | ~22 kg  |